


Portaherramientas CNC de precisión

PORTAFRESA ESCARIADORA (de brida en V) CAT

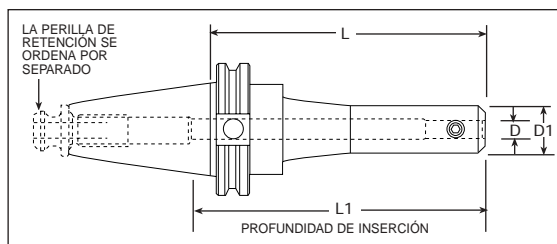

	Part No.	D	D1	L	L1	Ret. Knob Thread
CAT 50 LONGITUD DEL PERNO	SC50SE0625	0.6250	1.75	2.06	4.50	1" - 8
	SC50SE0750	0.7500	1.75	2.06	4.50	1" - 8
	SC50SE1000	1.0000	2.00	2.25	4.50	1" - 8
	SC50SE1250	1.2500	2.50	2.25	2.75	1" - 8
	SC50SE1500	1.5000	2.62	2.75	2.75	1" - 8
LONGITUD ESTÁNDAR	SC50E0187	0.1875	0.68	2.50	3.80	1" - 8
	SC50E0250	0.2500	0.75	2.50	3.80	1" - 8
	SC50E0312	0.3125	0.75	2.50	3.80	1" - 8
	SC50E0375	0.3750	1.00	2.50	4.00	1" - 8
	SC50E0437	0.4375	1.25	2.50	4.00	1" - 8
	SC50E0500	0.5000	1.38	2.62	5.00	1" - 8
	SC50E0625	0.6250	1.50	3.75	6.00	1" - 8
	SC50E0750	0.7500	1.75	3.75	4.00	1" - 8
	SC50E0875	0.8750	2.00	3.75	4.31	1" - 8
	SC50E1000	1.0000	2.00	4.00	4.50	1" - 8
	SC50E1250	1.2500	2.50	4.00	2.75	1" - 8
	SC50E1500	1.5000	2.75	4.00	3.50	1" - 8
SC50E2000	2.0000	3.75	5.62	3.50	1" - 8	
LONGITUD EXTENDIDA	SC50EE0187	0.1875	0.68	4.50	7.00	1" - 8
	SC50EE0250	0.2500	0.75	4.50	7.00	1" - 8
	SC50EE0312	0.3125	0.75	4.50	7.00	1" - 8
	SC50EE0375	0.3750	1.00	4.50	7.00	1" - 8
	SC50EE0437	0.4375	1.25	4.50	7.00	1" - 8
	SC50EE0500	0.5000	1.38	4.62	7.00	1" - 8
	SC50EE0625	0.6250	1.50	5.75	8.00	1" - 8
	SC50EE0750	0.7500	1.75	5.75	4.31	1" - 8
	SC50EE0875	0.8750	1.87	5.75	4.31	1" - 8
	SC50EE1000	1.0000	2.00	6.00	4.50	1" - 8
	SC50EE1250	1.2500	2.50	6.00	2.75	1" - 8
	SC50EE1500	1.5000	2.75	6.00	3.50	1" - 8
SC50EE2000	2.0000	3.75	7.62	3.50	1" - 8	
LONGITUD EXTENDIDA EXTRA	SC50EXE0187	0.1875	0.68	6.50	9.00	1" - 8
	SC50EXE0250	0.2500	0.75	6.50	9.00	1" - 8
	SC50EXE0312	0.3125	0.75	6.50	9.00	1" - 8
	SC50EXE0375	0.3750	1.00	6.50	9.00	1" - 8
	SC50EXE0437	0.4375	1.25	6.50	9.00	1" - 8
	SC50EXE0500	0.5000	1.38	6.62	9.00	1" - 8
	SC50EXE0625	0.6250	1.50	7.75	10.00	1" - 8
	SC50EXE0750	0.7500	1.75	7.75	10.00	1" - 8
	SC50EXE0875	0.8750	1.87	7.75	4.31	1" - 8
	SC50EXE1000	1.0000	2.00	8.00	4.50	1" - 8
	SC50EXE1250	1.2500	2.50	8.00	2.75	1" - 8
	SC50EXE1500	1.5000	2.75	8.00	3.50	1" - 8
SC50EXE2000	2.0000	3.75	9.62	3.50	1" - 8	

NOTA: Soportes balanceados a 22,000 RPM disponibles a solicitud.