


RD/ER 50 COLLET SYSTEM

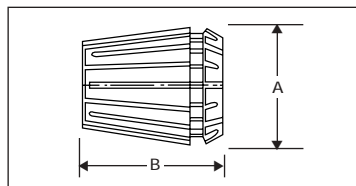

A = 52 mm. (2.05 in.)

B = 60 mm. (2.36 in.)

Collapse per collet: 2 mm. (0.079 in.)
 Capacity per set: 10 - 24 mm. (0.394 - 1.339 in.)
 Precision per DIN 6499

RD/ER 50 COLLETS

		METRIC SIZES	
		STANDARD PRECISION	HIGH PRECISION
Clamping Range (mm.)	Clamping Range (in.)	Part No.	Part No.
12-10	0.472-0.394	500-001	500-901
14-12	0.551-0.472	500-002	500-902
16-14	0.630-0.551	500-003	500-903
18-16	0.709-0.630	500-004	500-904
20-18	0.787-0.709	500-005	500-905
22-20	0.866-0.787	500-006	500-906
24-22	0.945-0.866	500-007	500-907
26-24	1.024-0.945	500-008	500-908
28-26	1.102-1.024	500-009	500-909
30-28	1.181-1.102	500-010	500-910
32-30	1.260-1.181	500-011	500-911
34-32	1.339-1.260	500-012	500-912
12 Pc. Set		500-013	500-913

NOTE: Inch sizes in standard and high precision, coolant collets, and RTS tapping collets with square drive are available upon request.